



# PRODUCT INTRODUCTION

A-B CHIP

## Indoor rental LED screen

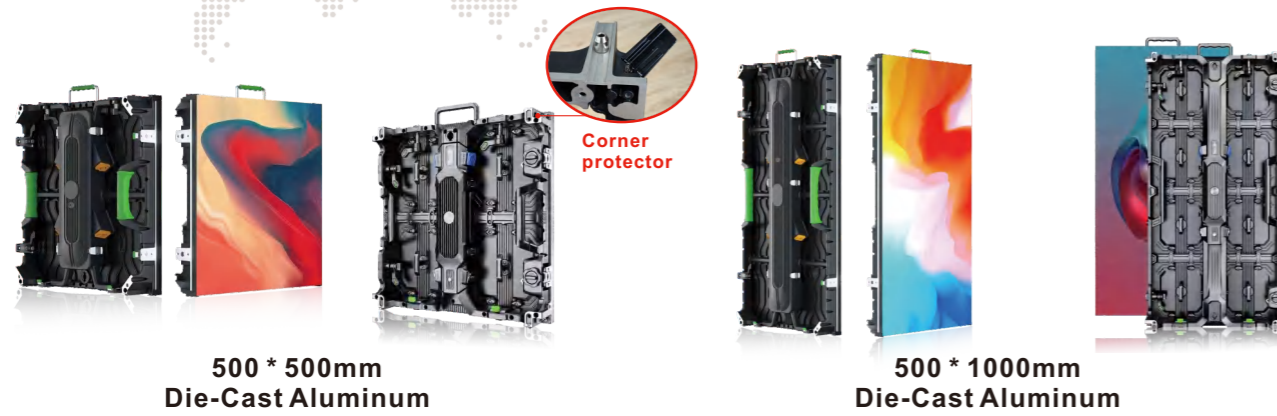

### Module information

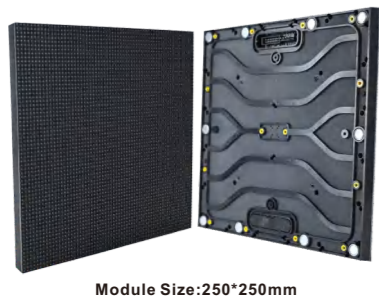


Model	<span style="color:red">New</span> P1.953	<span style="color:red">Hot</span> P2.604	<span style="color:red">Hot</span> P2.976	<span style="color:red">Hot</span> P3.91	P4.81
Size	250*250mm				
Pitch	1.953mm	2.604mm	2.976mm	3.91mm	4.81mm
lamp bead	1515	1515	2020	2020	2020

### Product superiority



### Way to install

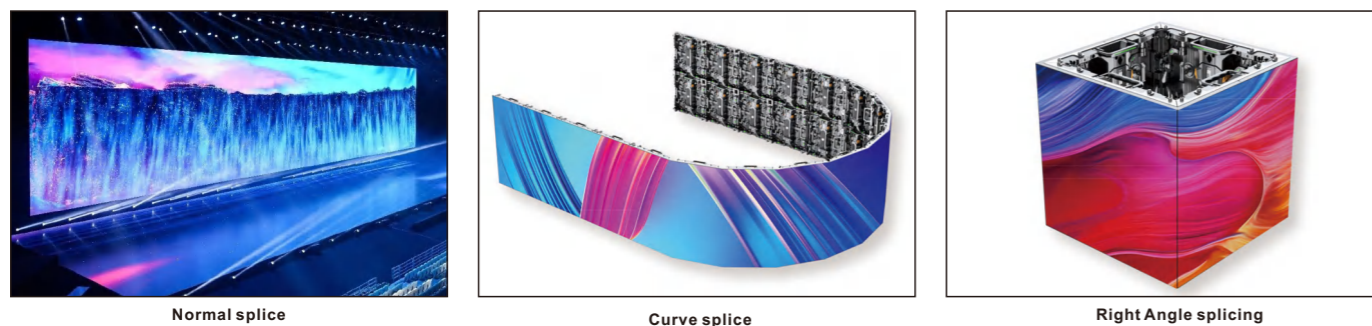

# PRODUCT INTRODUCTION

A-B CHIP

### Application



### Parameter

Model	P1.953	P2.604	P2.976	P3.91	P4.81
Pitch	1.953mm	2.604mm	2.976mm	3.91mm	4.81mm
Density	262114 dots/m <sup>2</sup>	147456 dots/m <sup>2</sup>	112896 dots/m <sup>2</sup>	65536 dots/m <sup>2</sup>	43264 dots/m <sup>2</sup>
LED Type	SMD1515		SMD2020		
Module Size	250*250mm(W*H)				
Module Resolution	128*128(W*H)	96*96(W*H)	84*84(W*H)	64*64(W*H)	52*52(W*H)
Cabinet Size	500*500*75mm / 500*1000*75mm(W*H*D)				
Cabinet Resolution	256*256 256*512(W*H)	192*192 192*384(W*H)	168*168 168*336(W*H)	128*128 128*256(W*H)	104*104 104*208(W*H)
Module	2*2=4pcs / 2*4=8pcs				
Power	300W/m <sup>2</sup> - 800W/m <sup>2</sup>				
Brightness	≥800CD/m <sup>2</sup>				
Best Viewing Distance	≥2m	≥3m		≥4m	≥5m
Driving mode	1/32Scan	1/32Scan	1/28Scan	1/16Scan	1/13Scan
Viewing Angle	H:160° V:160°				
Refresh Rate	3840Hz / 7680Hz				
Pixel Configuration	1R1G1B				
Protection Degree	IP31				
Operating Voltage	110V / 220V				
Working Temperature	-20°C - 50°C				
Lifetime	100000H				
Installation mode	Hoisting / Fixed installation / Arc installation				
Customized Solutions	<b>Non-standard specifications can be customized</b>				

# PRODUCT INTRODUCTION

A-B CHIP

## »» Indoor fixed LED screen



640 \* 480mm  
Die-Cast Aluminum



960 \* 960mm  
Die-Cast Aluminum



960 \* 960mm  
Iron cabinet  
Customized size

### Module information



Module Size:320\*160mm


Model	Hot					Hot			
	P1.25	P1.538	P1.667	P1.86	P2	P2.5	P3.076	P4	P5
Size	320*160mm								
Pitch	1.25mm	1.538mm	1.667mm	1.86mm	2mm	2.5mm	3.076mm	4mm	5mm
lamp bead	1212	1212	1212	1515	1515	2020	2020	2020	2020



### Screen installation



01 Install the frame and the power supply

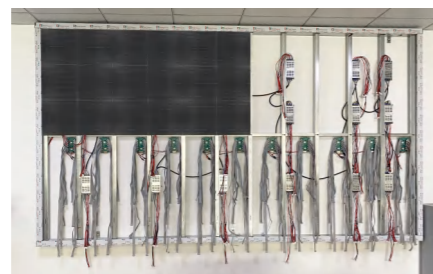

02 Install the screen



03 Installation completed

# PRODUCT INTRODUCTION

A-B CHIP

### Application



### Parameter

Model	P1.25	P1.538	P1.667	P1.86	P2	P2.5	P3.076	P4	P5
Pitch	1.25mm	1.538mm	1.667mm	1.86mm	2mm	2.5mm	3.076mm	4mm	5mm
Density	640000/m <sup>2</sup>	422753/m <sup>2</sup>	360000/m <sup>2</sup>	289050/m <sup>2</sup>	250000/m <sup>2</sup>	160000/m <sup>2</sup>	15688/m <sup>2</sup>	62500/m <sup>2</sup>	40000/m <sup>2</sup>
LED Type	SMD1212	SMD1212	SMD1212	SMD1515	SMD1515	SMD2020	SMD2020	SMD2020	SMD2020
Module Size	320*160mm(W*H)								
Module Resolution	256*128 (W*H)	208*104 (W*H)	192*96 (W*H)	172*86 (W*H)	160*80 (W*H)	128*64 (W*H)	86*43 (W*H)	80*40 (W*H)	64*32 (W*H)
Cabinet Size	640*480mm(W*H) / 960*960mm(W*H)								
Power	(100W/m <sup>2</sup> - 300W/m <sup>2</sup> ) - ≤550W/m <sup>2</sup>								
Brightness	≥800CD/m <sup>2</sup>								
Best Viewing Distance	≥2m			≥3m			≥4m		≥5m
Module	2*3=6pcs / 3*6=18pcs								
Viewing Angle	H:160° V:160°								
Refresh Rate	3840Hz / 7680Hz								
Pixel Configuration	1R1G1B								
Protection Degree	IP31								
Operating Voltage	110V / 220V								
Working Temperature	-20°C - 50°C								
Lifetime	100000H								
Installation mode	Hoisting / Fixed installation / Arc installation								
Customized Solutions	<b>Non-standard specifications can be customized</b>								